

# A Review on Ocean Energy Power Generation Technologies

Devanshu Kanojiya  
M.Tech. Scholar  
Department of EX  
Lakshmi Narain College of Technology  
Bhopal, M.P., India

Dr. Manish Khemariya  
Professor  
Department of EX  
Lakshmi Narain College of Technology  
Bhopal, M.P., India

**Abstract-** Ocean tidal currents, water waves and thermal gradients are a great source of renewable energy. Oceans cover almost 71 % surface of earth. Waves carry enormous amount of energy within them. Tides generated due to gravitational force between earth and moon and partly between earth and sun help in generating high heads of water to harness pollution free energy. Due to high cost of generation and lack of enough research, this sustainable source of energy has not been fully exploited yet. Although the technology used in harnessing marine energy is considered as a threat to aquatic life, but suitable methods and focused research in this area can lead to take advantage of this abundant source of renewable energy.

Ocean tidal, osmotic, wave and thermal sources have annual potentials of 800, 2,000, 8000–80,000 and 10,000–87,600 TWh, which are more than global 16,000 TWh/y electricity demand. Ocean wave generators produce relatively lower output, however, four to eleven meters tidal range stations have large power generation capacities. Abundant ocean heat energy potentially harvested using ocean thermal energy conversion (OTEC) devices and ocean thermo-electric generators (OTEG). Tidal stations may be tidal range or current types, but a wave energy converter (WEC) may be an oscillating water column (OWC), overtopping, heaving, pitching and surging devices. Ocean thermal energy can be harnessed by open, close Rankine cycles, thermo-electric generators and osmotic power plants. Large bays like Turnagain (USA), Annapolis/Minas Passage (Canada), Seven Barrages/Pentland Firth (UK), La Rance (France), Garorim (South Korea) and Mezen/Penzhin (Russia) have huge tidal current power generation capacities. Power Potential from tidal current stations is more than WEC devices which in turn is more than osmotic, OTEC and OTEG technologies. This paper reviews the current state-of-the-art of tidal, wave, OTEC and OTEG ocean energy technologies.

## I. INTRODUCTION

Sun provides more than 99.99% of energy and earth contributes about 0.01% [1]. Fossil fuels are a form of antediluvian eon solar energy. All sources of energies, except geothermal and nuclear, are ultimately powered by the sun [2]. Earth radiates heat and its thermal energy come from radioactive decay (80%) and planetary accretion (20%) [3]. Oceans encompass over 70% of the earth's mass. Ocean tides are caused by earth's gravitational interaction with the moon (68%) and sun (32%). The impact of the moon is 2.6 times more than the sun due to its shorter distance from earth. Ocean waves are caused by friction of winds with the water surface. Earth has lost 17% of its rotational energy due to its slow deceleration rate of  $12.19\mu\text{s}/\text{y}$  [4]. Oceans are a great form of renewable energy which is stored in the form of thermal energy (heat), kinetic energy (tides and waves), chemical energy (chemicals) and biological energies (biomass). Tidal current or wave generators harvest kinetic energies, and osmotic power plants and thermo-electric generators reap salinity and thermal gradients [5]. Up to date ocean power technologies and barriers are reported in the literature [6,7].

Climate change, S curved growths, population, energy and power crises require to explore and harvest renewable energy resources. Akin to hydropower, wind and solar energies the ocean dynamism is an ideal energy resource. The tide is a periodic rise and fall of water in the seas and oceans, twice during a lunar day (24Hr and 50 min). Ocean water remains at the maximum level for 50 min at different times on different days repeating the cycle every 19 years. Sea and ocean levels at different locations depend on their latitudes and shore. Lunar motion around the earth increases time interval between successive tides from 12 h to 12 h and 25 min. The earth, moon and sun become aligned every two weeks, at new and full moon days, to create maximum height spring tides. On waxing and waning half moon days,

in the first and third quarter, the sun being at 90° creates least height neap tides. The performance of tidal and wave power plants depends on days of months and wind speeds during the years. Water waves are high in deep oceans and low near shallow shores. Wave generator performance depends on wave amplitudes which are governed by wind speeds. Water waves may become dangerous during gusts and storms. Gravity, wind and sunshine driven tidal wave and thermal power potentials were guessed earlier to be 22,000, 2000 and 87600 TWh/y [8] but recent estimates show alone wave power potential of 2985 GW [7].

Ocean temperature varies from 24 to 28 °C on surface to 4–6 °C at 1 km depths. The difference in temperature may be a basis of the ocean thermo-electric generator. Temperature differences of 20 °C are easily available in torrid and temperate zones between 30°S and 30°N latitudes [9,8]. Tidal potential is evenly distributed worldwide, OTEC potential is high in equatorial regions, but wave energy potential is higher in the tropic zones. Tidal power generation sites occur naturally along the sea and oceans like coal, oil, gas, shale and mineral reserves. Worldwide tidal power generation sites explored include 4,200 MW Pentland Firth (UK) [10,11] 818 to 1,320 MW Incheon and Red Tides Sihawa Bay (South Korea) [12], Kislava Guba (Belgium) [13], 6500 MW Turnagain (USA), 2,800 MW Walcott Inlet (Australia), 5338 MW Cobequid (Canada), 7000 MW Khambat Gulf (India) and Johnstone Strait [14] and Minas Passage Bay of Fundy (Canada) [15,16].

Some estuaries and channels, like Hudson Strait (Canada), are reported to be reminiscent of half-wave resonant oscillations [16]. Ocean thermo-electric, underwater marine and surface wave generators have relatively smaller outputs, but tidal power plants give off bulk powers. Old tidal current power stations such as 3.2 MW Jiangxia Tidal Power Station (China), 20 MW Annapolis Royal Generating Station (Canada), 240 MW Rance Tidal Power Station (France) and 250 MW Sihwa Lake power Station (South Korea) have relatively low to moderate power generation capacities, but recently planned large tidal power stations such as 2,200 MW Dalupiri Blue Energy Project (Philippines), 3640 MW Tugurskaya Tidal Power Station (Russia), 8640 MW Seven Barge (UK) and 12,000 MW Mezenskaya Tidal Power Station (Russia) are large power stations.. India intends to construct a 50 MW tidal power station in the Gulf of Kutch and there is unconfirmed news of 87,100 MW Penzhinskaya Tidal Power Station in Penzhin Bay Russia [17]. There are hundreds of types of marine current turbines. The British government has started an ambitious target of 200–300 MW ocean energy by 2020. Denmark started a €3 million project for wave energy in 2012 under national initiative to produce 35% of electricity from renewable energy by 2020. As of 2012 Europe produced 246.20 MW compared to 259.20

MW by Asia. Global ocean energy production was 527.70 MW by the end of 2012 which is likely increase many times by 2020 due to multiple wave energy projects worldwide. Ireland has an estimated potential of 29 GW ocean energy [18]. Ocean thermal energy potential is much more than the tidal and wave power potentials [19]. Low temperature refrigerant based heat exchangers can to some extent extract the ocean power, but ocean thermo-electric generators (OTEG) can harvest this large natural potential if low thermal gradient high figure of merit materials become available.

## II. TIDAL CURRENT POWER

Tidal power generation depends on the rise and fall of sea and ocean waters. About 4–12 m range spring and neap tides have an estimated potential of 1–10 MW/km along the seashores. Terrestrial and celestial gravitational variations predictably affect power generation capacities. Spring tides (high tides) occur on new as well as full moons and neap tides (low tides) occur in waxing or waning half moons due to misalignment of the earth with the moon and the sun. The Earth rotates on its axis at speed of 16,500 km/h and revolves around the sun at a speed of 107,000 km/y. Earth completes one rotation in one day (24 h) but moon completes one revolution around the earth in 29.53 days. A solar month has 30 days in a month, whereas lunar month has 29 days and 10 min, so the solar month is 50 min longer than lunar month. In a solar month earth and moon twice become aligned to exert a maximum gravity pull on ocean waters to create spring tides. Ocean waters bulge out by lunar and solar gravitational forces at new moon and full moon. Tidal power generation potential may be estimated by considering an estuary on sea shore. If the spring tide water level is R meters over the sea datum line, then energy potential is given by:

$$E = \rho g \int_{h=0}^{h=R} h A dh$$

Where  $\rho$  is sea water density (kg/m<sup>3</sup>) and  $g$  is gravitational constant (9.81 m/s<sup>2</sup>). The energy associated with a fixed area estuary may be given by

$$E = \frac{1}{2} \rho g A R^2$$

Taking  $P=E/t$ , the average power (in kW) comes out to be

$$P = \rho g R^2 / \text{Time} = (1025 \times 9.81 \times A \times R^2) / 44700 = 225 AR^2$$

Where 44,700 are seconds in 6 h and 12.5 min. In case of a double cycle tidal station producing electricity in forward and reverse directions of water flows then the power potential increases to 450AR<sup>2</sup> kW twice of the single cycle station. If the tidal range equal to difference of maximum

and minimum levels in the basin, then at an average water discharge rate ( $Q = AH/t$ ) through the turbine the work done by falling water through  $h$  height is given by

$$P = \rho Qh$$

Power generation potential for tidal cycles by  $\eta$  efficiency turbine in a year is

$$P_{\text{year}} = \int_0^t P dt$$

Tidal power generation capacity increases with tidal range and minimum barrage, dam or dyke. A suitable storage may be achieved with an estuary, creek, channel, rut or runnel close to sea shore. Important components of tidal power stations are barrage to form a basin or estuary, sluice gates to fill or empty basins, turbines to convert kinetic energy into mechanical energy which can be converted to electricity by coupling generator. The dyke crest and slopes are constructed of rock filling to withstand water waves. The sluices are equipped with local as well as remote controlled gates. Sluice gates may be fabricated out of steel to withstand salty water. Akin to run of river and dammed hydropower plants the ocean tidal power stations may be categorized as tidal range and tidal current stations.

Depending upon the situation the tidal power stations are classified as single basin single operation, single basin double operation, double basin with the link's basin operation and double basin with paired basin operation as shown in Fig. 1. Single operation sluice opens during high tides, but remains closed during emptying process. Tidal power turbine functions only during emptying process. Single operation turbine generation period is 3.5 h. Double operation reversible turbine and sluice function during high tide, but sluice remains closed during emptying process. Output of double operation tidal plant is not twice, instead just 15% more than the single operation turbine. Typical example of a double operation turbine is 240 MW tidal station La Rance (France). Sluice of the high basin linked barrage opens during high tide for filling and low basin sluice opens during emptying process. The turbine is placed on Tied barrage. In the case of double paired barrages upper sluice opens during filling and lower sluice during emptying process. The tidal power stations are suitable for intermediate demands between base and peak loads. Tidal current turbines may be horizontal or vertical axis types like horizontal (HAWT) and vertical (VAWT) axis wind turbines.

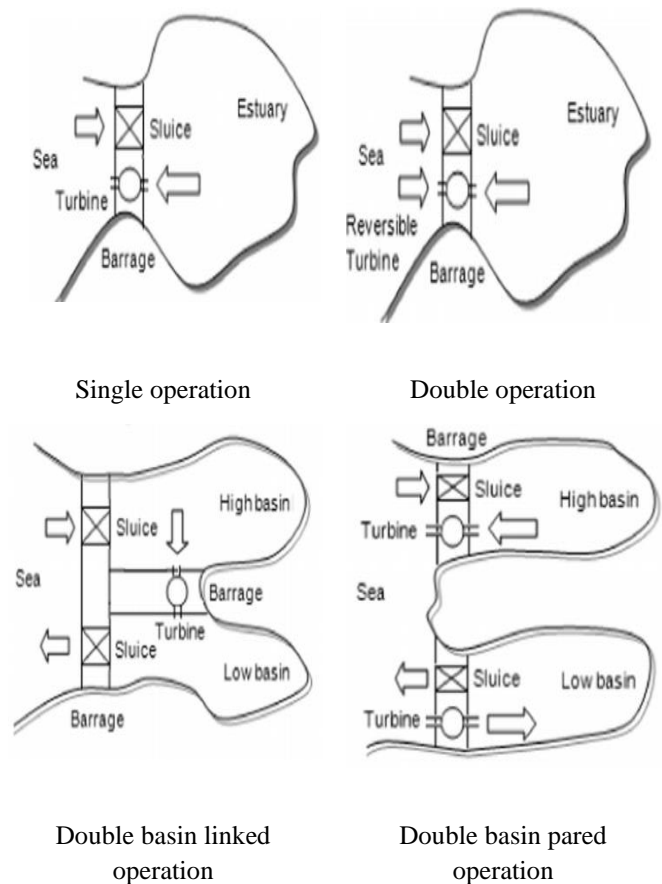


Figure 1: Four Categories of Single, Double Linked and Paired Tidal Power Stations

Tidal barrage design depends on tidal ebb and flow of range greater than 5 m like conventional low head hydropower stations. Tidal current design depends on greater than 1.5 m water waves. Tidal currents flow in horizontal as well as vertical directions. Marine current designs are similar to tidal currents caused by the trade winds. Tidal power costs 165,000£/MW whereas wave power costs 175,000£/MW [19]. Tidal and wave power farms provide both electricity and jobs.

### III. WAVE ENERGY CONVERTERS (WECS)

Winds generate water waves on the ocean surface. These water waves are 1.3–2.86 m high near seashore several meters high in deep oceans. Water wave height depends on depth of ocean. Huge energy fluxes are available along the sea coastlines. Wind energy is converted into water waves thinly distributed in all directions over the oceans.

Wave farms energy density is 2–3 kW/m<sup>2</sup> which is higher than solar parks (0.1–0.2 kW/m<sup>2</sup>) and wind farms (0.4–0.6 kW/m<sup>2</sup>). Ocean waves have both potential and kinetic energies. Wave amplitude  $2a$  from crest to trough in vertical direction varies in a sinusoidal manner. The amplitude of a point on wave may be expressed by

$$y = a \sin \left( \frac{2\pi x}{\lambda} - \frac{2\pi t}{T} \right)$$

Assuming  $2\pi/\lambda=M$  and  $2\pi/T=N$  we can rewrite:

$$y = a \sin (Mx - Nt)$$

$$PE = \frac{1}{2} g * \rho * B * y^2 dx$$

#### IV. OCEAN THERMAL ENERGY CONVERTERS

Ocean thermal energy may be harnessed by ocean thermal energy converters (OTEC), Ocean thermo-electric generators (OTEG) and salinity gradient osmotic power plants at points where rivers fall into the oceans. Sun shines uniformly over land masses and ocean waters. Glaciers reflect the sunlight, but oceans absorb it to heat the water. The oceans being over 70% of the earth absorb solar energy equivalent to 250 billion barrels oil equivalent. Ocean annual power production using OTEC systems is estimated to be 30TW.

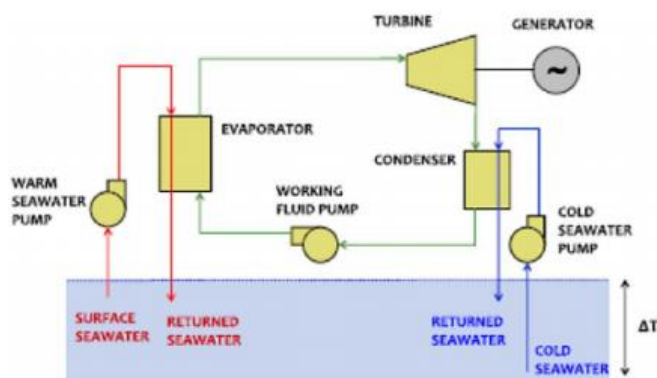


Figure 2: A close cycle OTEC system

Different researchers guess the OTEC power varies from 30 to 80 kW/km<sup>2</sup> of ocean surface areas [20]. This energy may be extracted from various types of OTEC devices [21]. Coal and nuclear power plants need lots of water for their normal operation. If OTEC is integrated to recycle its waste water then it can enhance coal and nuclear plant output by 25–37 MW as shown in Fig. 2 [22].

#### V. OCEAN THERMO-ELECTRIC GENERATORS (OTEG)

Ocean thermo-electric generators (OTEG) need usually over 100 °C temperature gradient to produce reasonable electric power. TEGs are used with incinerators to convert waste heat to electricity. They are also used on poles to convert large negative temperature difference between the ice (0 °C) and air (–50 °C) which twice than maximum ocean

temperature. They can also convert concentrated solar energy into electricity. Regarding ocean energy OTEGs may be used by coal power plants to convert the waste energy into electricity as well as subsea oil wellheads to power the submerged instruments.

Temperature difference between the ocean floor water and deeper well head is high enough to power thermo-electric generators. OTEC energy was conceived in 1970s [23] and OTEG energy in 1980s [24]. OTEG may supply power in the range of 1–10 W watts to subsea control electronics for oil wellheads. In a TEG the temperature gradient causes charged carriers to diffuse from the hot to the cold side. The effect can be used to measure temperature, cause cooling/heating and generate electricity. Thermo-electric generators are based on the Seebeck effect caused by charge carriers diffusion and phonon drag. Temperature gradient causes high densities of electrons in n-type materials and holes in p-type materials.

Charge carriers diffuse within thermo-electric materials from hot to cold sides. Phonons move against the thermal gradient interacting with electrons to push them to one end of the material, thereby losing momentum contributing to the electric field building. A TEG can convert waste heat from thermal power plants, engine exhaust and flue gases into power.

#### VI. OCEAN ENERGY IN INDIA

An assessment made by Ministry of New and Renewable Energy indicates around 8000 MW potential of tidal energy in India. This includes 7000 MW in Gulf of Khambhat, 1200MW in Gulf of Kutch in Gujarat and 100MW in Sunderban delta.

Southern tip of India (near Kanyakumari, southern Nagercoil and around) have prominent potential for wave power. Presence of strong winds without hindrance makes it a favorable site for off shore wind and wave power generation. Considering sites offering more than 10 kW/ m only, the wave power assessment [25] comes around 40 MW. However this entire power cannot be harnessed fully due to constraints such as availability of resources and natural conditions. The report on Study on Tidal and wave energy in India: Survey on potential and proposition of a roadmap, by IREDA, AFD and IIT, Madras submitted in December 2014 estimated the tidal power potential in India to be around 12500 MW for the tidal stream technology at Kutch and Khambhat and tidal barrage technology in the parts of India at some sites with large amount of back waters.

#### VII. ENVIRONMENTAL IMPACTS OF OCEAN ENERGY

Offshore and onshore wind farms create a noise so nobody wants to have them in their backyard (NIMBY). Ocean transport, tidal and wave power generation activities affect marine organisms [26]. Offshore wind turbines create risks of collisions, disturbance and bird migration. Electromagnetic fields and underwater noise disturb marine life [27]. When fishes pass through the turbine blades, they are injured in tidal and wave power plants. The tidal power plants change and modify wave and tide patterns at remote locations affecting the nearby environment [28]. Ship and generator noise upsets underwater creatures. Power generation equipments interfere with the navigational systems. Many marine creatures like turtles detect direction by the intensity of magnetic fields which can fail due to local magnetic fields [29]. Marine reproduction is badly affected by exposure to electromagnetic fields and noise bursts [30]. Marine animals migrate from high noise areas causing the environmental crisis. Ocean energy is clean in nature, but can affect the local ecosystem. Reversible osmotic power plants can provide both water and clean water. Pakistan has installed these plants in Thar Desert. These plants supply 25 MW electricity and 22 million gallons of clean water.

### VIII. CONCLUSION

Ocean energy may be harnessed by tidal power stations, wave energy converters, osmotic power plants, ocean thermal energy converters (OTEC) and ocean thermo-electric energy converters (OTEG) devices. Tidal power stations produce in the range of tens to hundreds of MW like hydel power stations, wave energy converters (WECs) from a few kW to MW, osmotic power stations from quite a few kW to MW, ocean thermal energy converters (OTECs) from kW to MW and ocean thermo-electric generators (OTEGs) from a few watts to kW. Tidal barrages, WECs, OTECs and osmotic plants are used commercially and OTEGs for powering submerged oil wellheads and small scale power generations in industries. Low thermal gradient thermo-electric materials can boost TEG technology. Of course, ocean energy is clean and renewable in nature, yet has minor environmental reservations.

Major ocean energy research activities include wave technologies, tidal stations, economic or policy studies and environmental concerns. Integration of ocean energy to the electric grid is another constraint yet to be addressed more realistically. Interconnection of ocean energy sources by running cables through salty waters and then to offshore grid poses serious challenges. Choice of AC/DC transmission of ocean power also needs economic and technical evaluations.

### REFERENCES

- [1] Khan N, Abas N, "Powering the people beyond 2050", *SCI Echnology Dev* 2012;31:131–51.
- [2] Abas N, Kalair A, Khan N, "Review of fossil fuels and future energy technologies" *Futures* 2015;69:31-49.
- [3] Turcotte DL, Schubert G. *Geodynamics*, 2nd ed. England: Cambridge University Press; 2002.
- [4] Williams GE, "Geological constraints on the Precambrian history of Earth's rotation and the Moon's orbit", *Rev Geophys* 2000;38:37–59.
- [5] Ben ElghaliSE, Benbouzid MEH, Charpentier JF. Marine, "Tidal Current Electric Power Generation Technology: State of the Art and Current Status", In: *Proceedings of the 2007 IEEE International Electr. Mach. Drives Conference, IEEE*, p. 1407– 1412.
- [6] Breeze P., "Tidal barrage power plant", *Power Gener. Technol. Second*, Oxford:Newnes Publisher; 2014.
- [7] López I, Andreu J, Ceballos S, Martínez de Alegría I, Kortabarria I., "Review of wave energy technologies and the necessary power-equipment", *Renew Sustain Energy Rev* 2013;27:413–34.
- [8] EU-OEA. European Ocean Energy Association. (<http://www.oceanenergy-europe.eu/index.php/association/about-the-association/articles-of-association>) [accessed 05.05.16]; 2016.
- [9] Azerbaijan B., "Environmental and Socio-Economic Impact Assessment (ESIA)", document for the Shah Deniz Stage2 (SD2); 2013.
- [10] Draper S, Adcock TAA, Borthwick AGL, Houlby GT., "Estimate of the tidal stream power resource of the Pentland", *Firth. Renew Energy* 2014;63:650–7.
- [11] Draper S, Adcock TAA, Borthwick AGL, Houlby GT., "A note on the power potential of tidal currents in channels", *Int J Mar Energy* 2014;6:1–17.
- [12] Kang NS, Lee KH, Jeong HJ, Yoo Y Du, Seong KA, Potvin É, "Red tides in Shihwa Bay, western Korea: a huge dike and tidal power plant established in a semi-enclosed embayment system", *Harmful Algae* 2013;30:S114–S130.
- [13] Chaineux M-C, Charlier RH., "Women's tidal power plant Forty candles for Kislaya Guba TPP", *Renew Sustain Energy Rev* 2008;12:2515–24.
- [14] Sutherland G, Foreman M, Garrett C., "Tidal current energy assessment for Johnstone Strait, Vancouver Island", *Proc Inst Mech Eng Part A J Power Energy* 2007;221:147–57.
- [15] Karsten RH, McMillan JM, Lickley MJ, Haynes RD., "Assessment of tidal current energy in the Minas Passage, Bay of Fundy", *Proc Inst Mech Eng Part A J Power Energy* 2008;222:493–507.
- [16] Cummins PF, Karsten RH, Arbic BK., "The semi-diurnal tide in Hudson strait as a resonant channel oscillation", *Atmosphere-Ocean* 2010;48:163–76.
- [17] Tech P., "Tidal giants - the world's five biggest tidal power plants.", *Power Energy.com*. (<http://www.power-technology.com/features/featuretidal-giants—the-worlds-fivebiggest-tidal-power-plants-4211218/>); 2014.
- [18] Support grows for ocean energy, "Renew Energy Focus", 2013;14:42–3. [http:// dx.doi.org/10.1016/S1755-0084\(13\)70075-9](http://dx.doi.org/10.1016/S1755-0084(13)70075-9).

- [19] EY. "Global trends in the emerging ocean energy market", 2013.
- [20] Meyers RA, editor., "Encyclopedia of Sustainability Science and Technology", New York, NY: Springer New York; 2012.
- [21] Gupta H, Roy S., "Thermal Energy Of The Oceans", Geotherm. Energy, Elsevier; 2007, p. 231-44.
- [22] Soto R, Vergara J., "Thermal power plant efficiency enhancement with Ocean thermal energy Conversion", Appl Therm Eng 2014;62:105-12.
- [23] Ocean Energy, "Handbook Energy", Elsevier; 2013. p. 541-4.
- [24] Bohn MS, Benson DK, Jayadev TS. "Thermoelectric ocean thermal energy conversion", J Sol Energy Eng 1980;102:119.
- [25] Government of India Ministry of Power Central Electricity Authority New Delhi, Executive Summary Power Sector February-15.
- [26] Walker TL, "Review of impacts of high voltage direct current sea cables and electrodes on chondrichthyan fauna and other marine life", Basslink Supporting Study No 29, Marine and Freshwater Resources Institute No 20, 68 pp. 2001.
- [27] GILL AB., "Offshore renewable energy: ecological implications of generating electricity in the coastal zone", J Appl Ecol 2005;42:605-15.
- [28] Nekrasov AV, Romanenkov DA., "Impact of tidal power dams upon tides and environmental conditions in the Sea of Okhotsk", Cont Shelf Res 2010;30:538-52.
- [29] Lohmann KJ, Lohmann CMF., "Detection of magnetic field intensity by sea turtles", Nature 1996;380:59-61.
- [30] Lin L, Yu H., "Offshore Wave Energy Generation Devices: Impacts on Ocean Bioenvironment", Acta Ecol Sin 2012;32:117-22.